



HGS (INDIA) LIMITED

6 Contact Morpho, Dynacon, field installable connector




158, Sector-4, IMT Manesar, Gurgaon-122050 Haryana INDIA
Tel: +91 (0124) 4681800, Fax: +91 (0124) 4681845
Email: sales@hgsindia.com



HGS (INDIA) LIMITED

SCHEMATIC

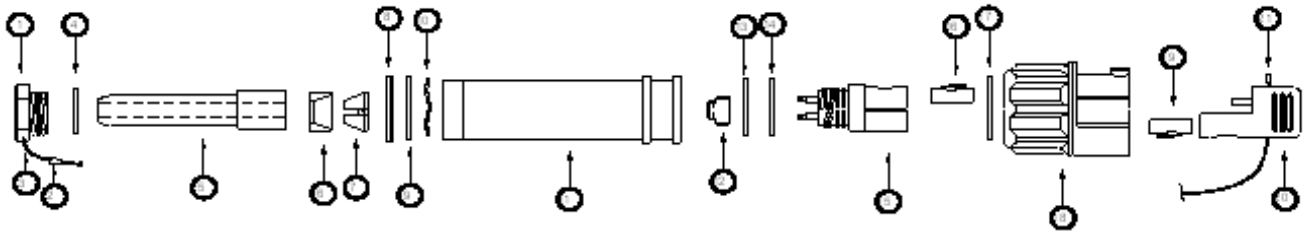

SR. NO.	DESCRIPTION	QTY.
1	COMPRESSION NUT, BLACK	1
2	FERRULE	1
3	INSULATED WIRE ROPE	30cm
4	BOOT WASHER	1
5	CABLE BOOT	1
6	WASHER COLLET	1
7	COLLET	1
8	RETAINING RING	1
9	ANTIFRICTION WASHER	1
10	WAVE SPRING	1
11	BACK SHELL	1
12	ANCHOR KEVLAR	1
13	O' RING	1
14	O' RING	1
15	CONTACT ASS Y. 6 PIN MORPHO	1
16	SEALING INSERT	1
17	ANTIFRICTION WASHER	1
18	LOCKING HANDLE	1
19	SEALING INSERT	1
20	DUST CAP	1
21	STOP SLEEVE	1

6 Contact Morpho, Dynacon, field installable connector



HGS (INDIA) LIMITED

SPECIFICATION

6 Contact Morpho, Dynacon, field installable connector

- Ideal for using as a replacement for defective over moulded connectors on Scorpion land cables for effective field repairs.
- Connector with 3 sets of male & female contacts.
- Available for different cable sizes.
- Impact Resistant Material.
- Fitted with dust cap.
- Mating with a locking handle.
- Maximum strength in rugged field conditions.
- Water proof for marsh environment.
- Gold plated pins & sockets assure positive electrical connections.
- Two options available for stress member termination based on customer's preference; either stress wafer termination or potted Kevlar termination.
- Operating Temperature Range: -20°C to +70°C
- Pressure Rating: Up to 3 bar