



HGS (INDIA) LIMITED

Cable assembly GDU to dynacon




158, Sector-4, IMT Manesar, Gurgaon-122050 Haryana INDIA
Tel: +91 (0124) 4681800, Fax: +91 (0124) 4681845
Email: sales@hgsindia.com



HGS (INDIA) LIMITED

SCHEMATIC

Cable Assy., GDU to Dynacon

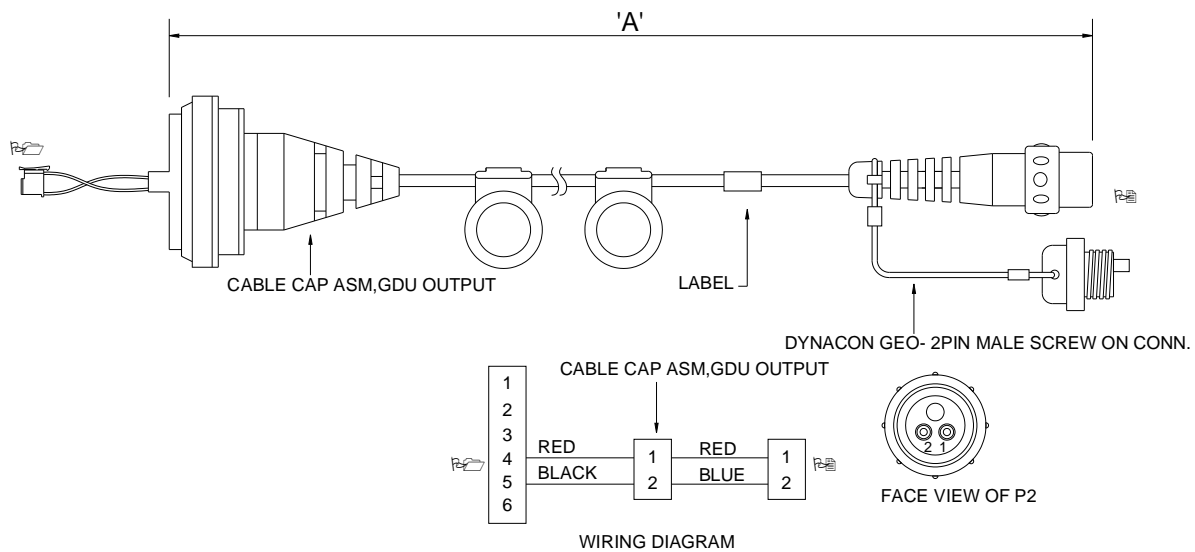

Cable assembly GDU to dynacon

158, Sector-4, IMT Manesar, Gurgaon-122050 Haryana INDIA
Tel: +91 (0124) 4681800, Fax: +91 (0124) 4681845
Email: sales@hgsindia.com



HGS (INDIA) LIMITED

SPECIFICATION

Cable assembly GDU to dynacon

- Cable assembly, GDU to Dynacon Geo 2 pin male connector
- Moulded on cable of 9.52 mm diameter
- Length of cable as per customer's requirement
- Molex connectors provided at GDU end for ease in assembly and replacement
- Dynacon Geo 2 pin male end connector with coupling ring assures mating with its counterpart
- Gold plated pins assure positive electrical connections
- Maximum strength in rugged field condition
- Dynacon Geo 2 pin male end connector fitted with dust cap
- Operating Temperature Range: -20°C to +70°C
- Pressure Rating: Connector waterproof up to 2 bar