



HGS (INDIA) LIMITED



HGS-16 Pin M Back to Back Connector



158, Sector-4, IMT Manesar, Gurugram-122050, Haryana, INDIA
Tel: +91 (0124) 4681800
Email: sales@hgsindia.com




HGS (INDIA) LIMITED



SCHEMATIC

HGS-16 PIN MALE B2B CONNECTOR

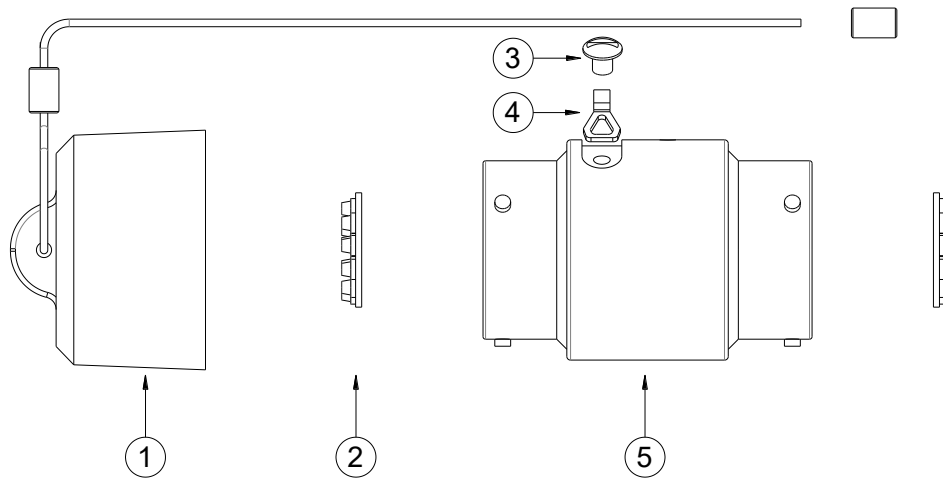

| | | |
|--------|---|---------|
| 5 | 16 PIN BACK TO BACK CONNECTOR SUB ASSY. | 01 No. |
| 4 | PAN HEAD SCREW | 01 No. |
| 3 | INSU. WIRE ROPE HOLDING CLIP | 01 No. |
| 2 | CONICAL WASHER | 02 Nos. |
| 1 | DUST CAP SUB ASSY. WITH WIRE ROPE & FERRULE | 01 No. |
| S. NO. | DESCRIPTION | QTY |



HGS (INDIA) LIMITED



SPECIFICATIONS

HGS-16 Pin M Back to Back Connector


- HGS-16 pin male back to back connector fitted with dust cap.
- Rigid Aluminum Body provides excellent impact protection.
- Easily field repairable.
- Impact Resistant Material.
- Operating temperature range: -20°C to +70°C.
- Pressure Rating: Up to 3 bar (50 psi).



HGS (INDIA) LIMITED



HGS-16 Pin Female Connector

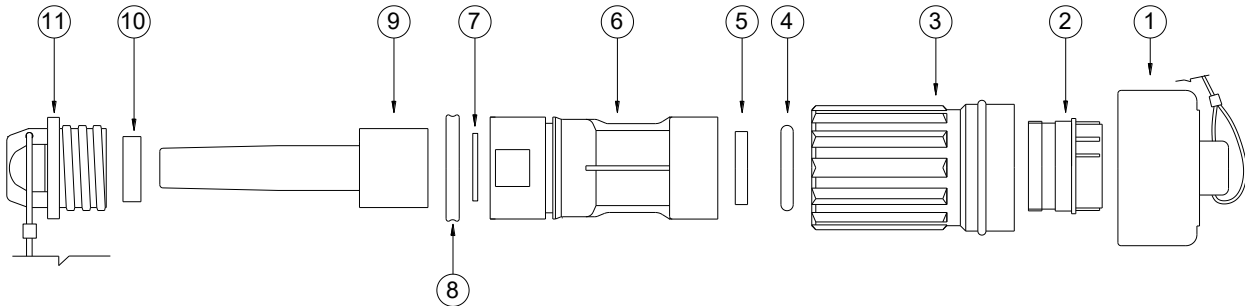

| | | |
|--------|---|--------|
| 11 | BOOT NUT | 01 No. |
| 10 | BOOT WASHER | 01 No. |
| 9 | CABLE BOOT | 01 No. |
| 8 | QUADRING | 01 No. |
| 7 | ALUMINIUM WASHER | 01 No. |
| 6 | CONN. BODY SUB ASSY. | 01 No. |
| 5 | STRESS WAFER | 01 No. |
| 4 | O-RING | 01 No. |
| 3 | COUPLING RING | 01 No. |
| 2 | 16 PIN F CONN. INSERT | 01 No. |
| 1 | DUST CAP SUB ASSY. WITH WIRE ROPE & FERRULE | 01 No. |
| S. NO. | DESCRIPTION | QTY |

158, Sector-4, IMT Manesar, Gurugram-122050, Haryana, INDIA

Tel: +91 (0124) 4681800

Email: sales@hgsindia.com



HGS (INDIA) LIMITED



SPECIFICATIONS

HGS-16 Pin Female Connector


- HGS-16 pin female connector fitted with dust cap.
- Easily field repairable.
- Impact Resistant Material.
- Operating temperature range: -20°C to +70°C.
- Pressure Rating: Up to 3 bar (50 psi).



HGS (INDIA) LIMITED



HGS-16 PIN MALE CONNECTOR

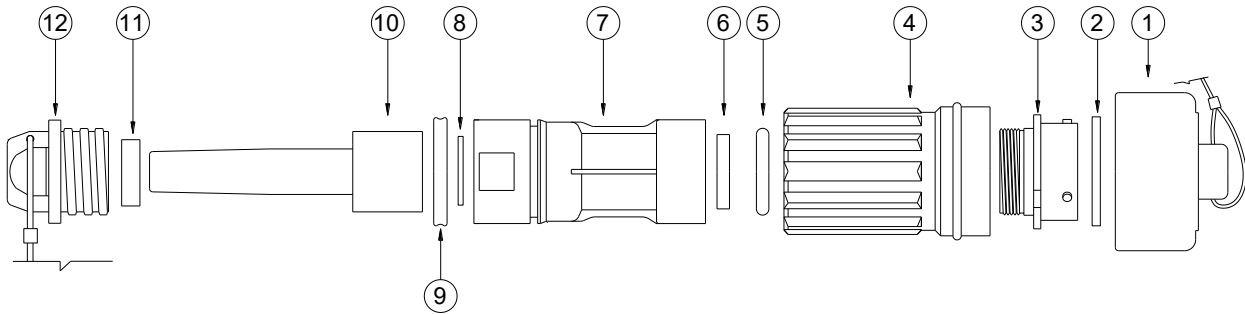

| | | |
|--------|---|--------|
| 12 | BOOT NUT | 01 No. |
| 11 | BOOT WASHER | 01 No. |
| 10 | CABLE BOOT | 01 No. |
| 9 | QUADRING | 01 No. |
| 8 | ALUMINIUM WASHER | 01 No. |
| 7 | CONN. BODY SUB ASSY. | 01 No. |
| 6 | STRESS WAFER | 01 No. |
| 5 | O-RING | 01 No. |
| 4 | COUPLING RING | 01 No. |
| 3 | 16 PIN M CONN. INSERT | 01 No. |
| 2 | SEAL | 01 No. |
| 1 | DUST CAP SUB ASSY. WITH WIRE ROPE & FERRULE | 01 No. |
| S. NO. | DESCRIPTION | QTY |

158, Sector-4, IMT Manesar, Gurugram-122050, Haryana, INDIA

Tel: +91 (0124) 4681800

Email: sales@hgsindia.com



HGS (INDIA) LIMITED



SPECIFICATIONS

HGS-16 Pin Male Connector

- HGS-16 pin male connector fitted with dust cap.
- Easily field repairable.
- Impact Resistant Material.
- Operating temperature range: -20°C to +70°C.
- Pressure Rating: Up to 3 bar (50 psi).

Version 1.2