




HGS (INDIA) LIMITED



ARS Resistivity Cable

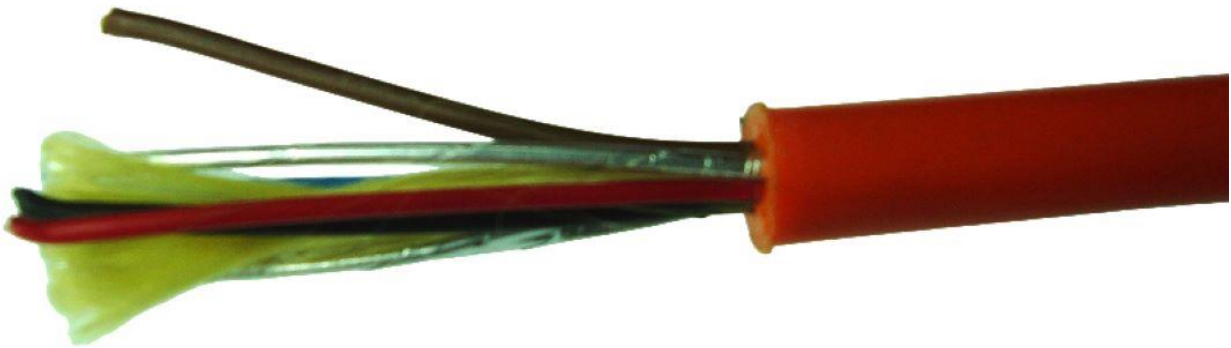

158, Sector-4, IMT Manesar, Gurugram-122050, Haryana, INDIA
Tel: +91 (0124) 4681800
Email: sales@hgsindia.com





HGS (INDIA) LIMITED




SCHEMATIC ARS Resistivity Cable

OPERATING VOLTAGE

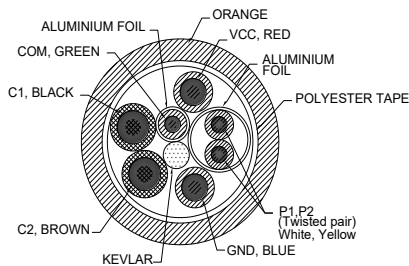


RESISTIVITY(ARS)CABLE

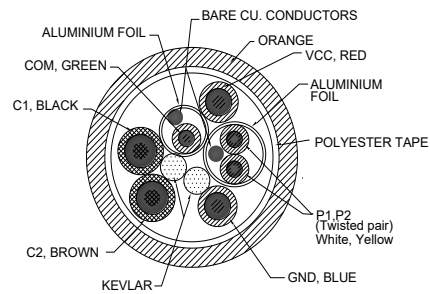

RESISTIVITY(ARS)CABLE with Bare Cond.

OPERATING VOLTAGE





HGS (INDIA) LIMITED



SPECIFICATIONS

ARS Resistivity Cable

- Customer specified resistivity cable for ARS.
- Preferred for groundwater & mineral exploration.
- Tinned copper conductor with or without aluminium foil.
- Heavy duty polyurethane sheathing.
- One or two stress members to provide required strength.
- Cable made as per customized requirements.
- Enough flexibility and strength for use in mobile field operations and frequent handling, transportation in form of coil etc.
- Excellent performance in rugged field conditions.
- Optional: one bare copper conductor.
- Operating Temperature Range: -20°C to +70°C.

Version 1.2