



HGS (INDIA) LIMITED



SPECIFICATION SHEET – GEOTiny10 (Compact Digital Seismometer)


- 3C seismic and 3C acceleration sensor
- DR: 146dB velocity, 97dB acceleration
- Wide response V:10s to 98Hz, A: DC-550Hz
- Low power consumption
- Cost affordable design
- Only 130mm D/115mm H
- Integrated 24bit digitizer, 138dB
- Embedded Seedlink & Earthworm Server
- Realtime Telemetry and Local Storage
- MiniSeed data format
- Linux open-source OS
- Web Interface Menu
- SSH, SFTP, HTTPS, CoAP, NTP
- Modular seismic sensor design
- Customized Sensor Corner Frequency
- High sensitivity 1500V/m/s
- Operation Range: -20 +70°C
- Waterproof IP67 aluminium case



GEOTiny10

System Features

GEOTiny10 is a compact miniature digital seismometer which integrates three seismic and three acceleration channels. It supports high resolution 24bit digitizer, embedded linux OS and GPS or NTP timing. Seedlink server ensures reliable real time data telemetry while large storage volume ensures long period local data recording. The instrument has very low power consumption so it can operate getting powered from a small 12Vdc battery. Due to its small size provides the ability to be buried underground. Modular sensor interface allows the user to select between a variety of sensor types and frequency corners (10sec, 5sec, 2sec, 1sec, 2Hz, 4,5Hz), thus covering the short period and wide band seismic range. Design simplicity is the great advantage and it is reflected to the price which is only fraction of the common commercial seismometers. The user is able to deploy even 100% more units than using common seismometers at same cost.

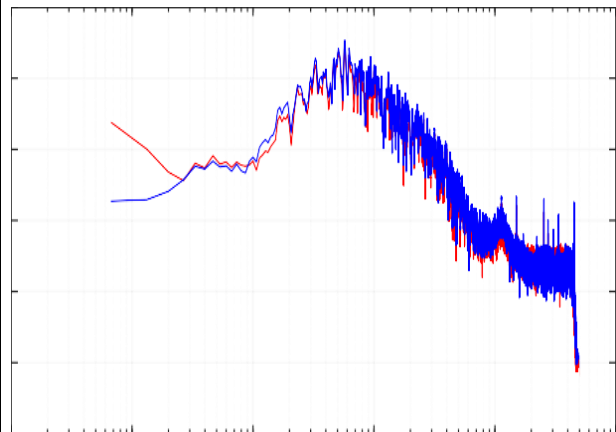


*Sensor PSD compared to a Guralp3T 120Sec sensor
RED= GEOTiny, BLUE = 120sec seismometer*



Major Applications:

- Aftershock monitoring
- Regional seismicity monitoring
- Seismic tomography acquisition
- Induced seismicity monitoring
- Volcano monitoring
- Structural monitoring
- HVSR, MASW surveys
- Educational seismograph
- Personal seismograph

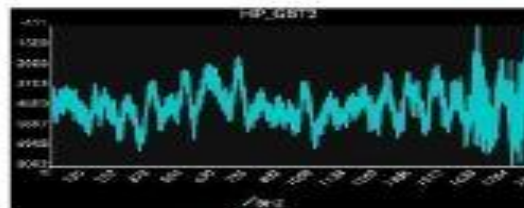

GEObit introduces world's lowest price, compact digital seismometer which integrates seismic and acceleration sensor, 24bit digitizer, local data storage and Seedlink Server for data telemetry.

GEOtiny10 Specifications:**DIGITIZER**

Channels	Three seismic and three acceleration channels
A/D converter	Fourth Generation, Delta-Sigma, 24bits
Nonlinearity	+/-0.001%
Modulator	Fourth Generation, 4th order Delta-Sigma Modulator
Filter	Programmable, FIR filtering
Analog Input	Modular sensor board
Sampling Rate	1 to 1000 samples per second
Power	9-18Vdc or 9-36Vdc 0.8W, 0.95 with integrated sensor board
Autonomy	One week powered from a 12V/9Ah battery, 36days powered from a 12V/55Ah car battery.
Dynamic Range	38dB @ 100sps

INTEGRATED FORCE-BALANCE SENSOR, ELECTONICS (modular)

Bandwidth	10sec–120Hz, variable frequency corner (10s, 5s, 2s , 1s, 2Hz , 4.5Hz)
Sensitivity	1500V/m/sec, Acc: +/-2g, +/-4g,+/-8g
Technology	Electro-dynamic Force–Balance technology
Dynamic Range	Velocity >142dB, Acceleration > 97dB

COMMUNICATION

Telemetry	Ethernet port, WiFi
Connectivity	SEEDlink
LED	5 high brightness LEDs monitoring system SOH
Protocols	SSH, FTP, SFTP, Web Interface, TCP/IP, HTTP, HTTPS, PPP, MQTT, CoAP/CoAPS, NTP

DATA RECORDING

Media	Internal flash up to 64Gb and External Removable Flash up to 128Gb (USB-SD)
Data file type	Miniseed
Information file	System log file
Recording mode	Continuous, Trigger or both

TIME BASE

Type	GNSS receiver (GPS, GLONASS, WAAS, EGNOS, BeiDou, QZSS)/DPLL, GPS port
------	--



HGS (INDIA) LIMITED
 158, Sector-4, IMT Manesar, Gurugram-122050, Haryana, INDIA
 Tel: +91 (0124) 4681800
 Email: sales@hgsindia.com | Website: www.hgsindia.com



Accuracy Time	+/-1usec to UTC time pulse, +/-5 meters to position
Timing Sources	GPS, RTC, NTP
DPLL drift	Less than 17usec between one hour GPS cycles
PHYSICAL (SEISMIC SENSOR)	
Type	Surface Type
Dimensions	130mm diameter x 115mm length
Cable length	Standard 5 meters, up to 50* meters
Mounting	Three adjustable legs
Weight	2.6kgr
Tilt	+/-10 degrees
ENVIRONMENT (DIGITIZER/RECORDER)	
Temperature	-20 to +70°C
Humidity	100%, IP67 enclosure

Ordering Information	
Item Description	HGS Part No.
GEotiny10 (Compact Digital seismometer)	MK001346



HGS (INDIA) LIMITED
 158, Sector-4, IMT Manesar, Gurugram-122050, Haryana, INDIA
 Tel: +91 (0124) 4681800
 Email: sales@hgsindia.com | Website: www.hgsindia.com

Version 1.0

