



# HGS (INDIA) LIMITED



## G3i LAND CABLE HEAD ASSEMBLY



158, Sector-4, IMT Manesar, Gurugram-122050 Haryana INDIA  
Tel: +91 (0124) 4681800, Fax: +91 (0124) 4681845  
Email: sales@hgsindia.com




# HGS (INDIA) LIMITED



## SCHEMATIC

### G3i LAND CABLE HEAD ASSEMBLY

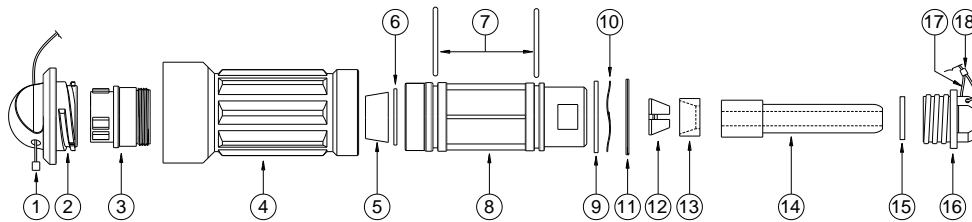

18	CRIMP SLEEVE	01 No.
17	INSULATED WIRE ROPE	40 cm
16	BOOT NUT	01 No.
15	BOOT WASHER	01 No.
14	CABLE BOOT	01 No.
13	WASHER COLLET	01 No.
12	COLLET	01 No.
11	G3i CABLE HEAD SPIRAL RETAINING RING	01 No.
10	G3i CABLE HEAD WAVE SPRING	01 No.
9	G3i 12 PIN CABLE HEAD WASHER	01 No.
8	G3i 12 PIN CABLE HEAD MAIN BODY	01 No.
7	O-RING	02 Nos.
6	G3i 12 PIN RING GASKET-12 PIN MAIN BODY	01 No.
5	CABLE STRESS RELIEF	01 No.
4	G3i 12 PIN CABLE HEAD COUPLER SUB ASSY.	01 No.
3	G3i 2012 CM INSERT SILICON INJECTION ASSY.	01 No.
2	G3i 12 PIN CABLE HEAD DUST CAP	01 No.
1	STOP SLEEVE	01 No.
S. NO.	DESCRIPTION	QTY



# HGS (INDIA) LIMITED



## SPECIFICATIONS

### G3i LAND CABLE HEAD ASSEMBLY

- Female connector with coupling ring and dust cap.
- Threads provided for mating with its counterpart male connector with coupling.
- Screw fit mating.
- Impact Resistant Material.
- Water proof for marsh environment.
- Gold plated sockets assure positive electrical connections.
- Maximum strength in rugged field condition.
- Operating temperature range: -40° C to +70° C.
- Pressure Rating: Up to 1.5 bar.

Version 1.1