



HGS (INDIA) LIMITED



Adaptor HGS-VI to Dynacon 6 Pin Male Connector



158, Sector-4, IMT Manesar, Gurugram-122050 Haryana INDIA
Tel: +91 (0124) 4681800, Fax: +91 (0124) 4681845
Email: sales@hgsindia.com




HGS (INDIA) LIMITED



SCHEMATIC

Adaptor HGS-VI to Dynacon 6 Pin Male Connector

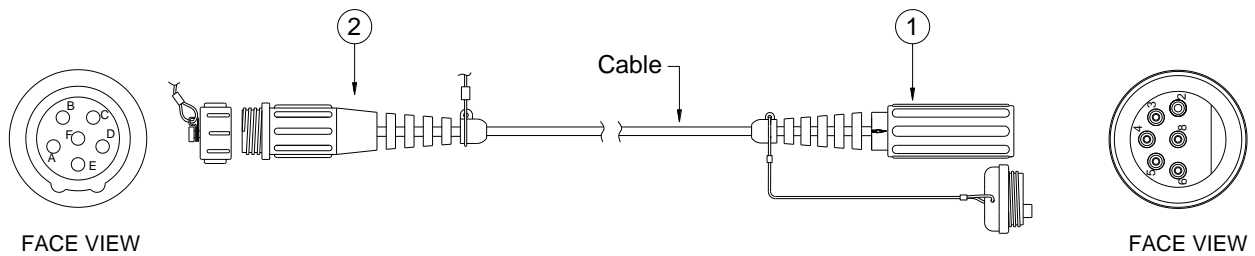

2	HGS-VI-F OVERMOULD CONN. ASSY., SINGLE START THREAD	01 No.
1	6 PIN M DYN OVERMOULD CONN. ASSY., 4 START THREAD	01 No.
S. NO.	DESCRIPTION	QTY



HGS (INDIA) LIMITED



SPECIFICATIONS

Adaptor HGS-VI to Dynacon 6 Pin Male Connector

- Adaptor HGS-VI to Dynacon 6 pin male connector with 3 pair cable.
- To be used between 3-axis geophone and Dynacon 6 pin panel mount connector.
- Impact Resistant Material.
- Water proof for marsh environment.
- Gold plated pins & sockets assure positive electrical connections.
- Maximum strength in rugged field condition.
- Fitted with dust caps.
- Operating temperature range: -20°C to +70°C.
- Pressure Rating: Up to 3 bar.

Version 1.1