



# HGS (INDIA) LIMITED



## 32 Conductor ABEM Cable



158, Sector-4, IMT Manesar, Gurugram-122050 Haryana INDIA  
Tel: +91 (0124) 4681800, Fax: +91 (0124) 4681845  
Email: [sales@hgsindia.com](mailto:sales@hgsindia.com)




# HGS (INDIA) LIMITED



## SCHEMATIC

### 32 Conductor ABEM Cable

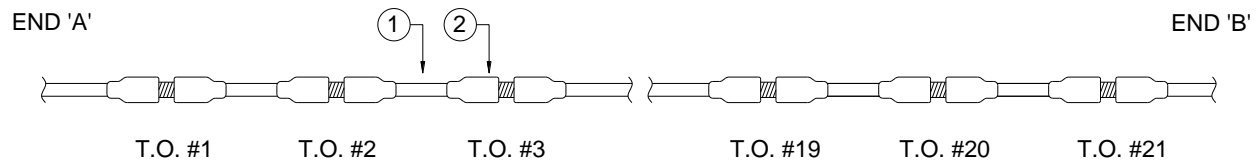

2	STEEL TUBE T.O. MOULDED FOR WIDE CLIP	21 Nos.
1	13 PAIR RES. CABLE WITH INSU. KEVLAR & BARE COND. ORANGE	As Req.
S. NO.	DESCRIPTION	QTY



# HGS (INDIA) LIMITED



## SPECIFICATIONS

### 32 Conductor ABEM Cable

- Customer specified resistivity cable.
- Used with ABEM system.
- Six copper and one steel wire for conductor.
- DC resistance < 290 ohms / km @ 20 C.
- Maximum OD: 8.35 mm.
- Break Strength > 100 kgf.
- Cable made as per customized requirements for takeouts and end connectors.
- Enough flexibility and strength for use in mobile field operations and frequent handling, transportation in form of coil etc.
- Excellent performance in rugged field conditions.
- Operating Temperature Range: -20°C to +70°C

Version 1.1