



HGS (INDIA) LIMITED



428 FDU STPL 1-4 LINK CABLE



158, Sector-4, IMT Manesar, Gurugram-122050 Haryana INDIA
Tel: +91 (0124) 4681800, Fax: +91 (0124) 4681845
Email: sales@hgsindia.com




HGS (INDIA) LIMITED



SCHEMATIC

428XL FDU STPL 1-4 LINK CABLE

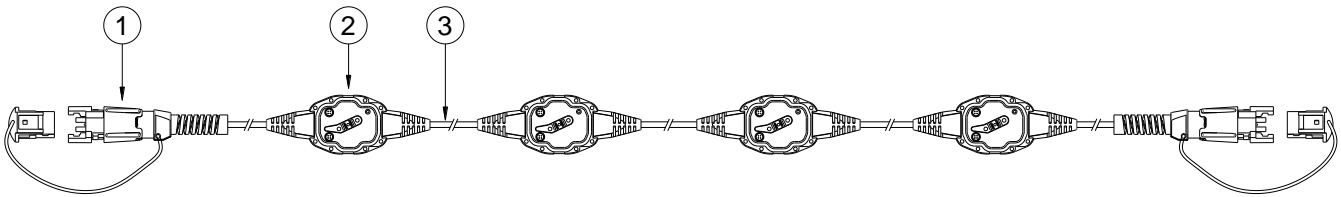

3	4 CONDUCTOR STPL CABLE, ORANGE	As Req.
2	428 FDU STPL TAKE OUT ASSY.	04 Nos
1	4 PIN WPSR END CONNECTOR ASSY., STPL CABLE	02 Nos.
S. NO.	DESCRIPTION	QTY



HGS (INDIA) LIMITED



SPECIFICATIONS

428 FDU STPL 1-4 LINK CABLE

Parameters	Value
Field Conditions	Wet
Conductor Arrangement	1 Quad
Conductor Type	Stranded
Water Blocked	No
Max. Water Depth	Rainy
Diameter	6.5mm
Tensile Strength (Nude Cable)	100daN
Tensile Strength (with connector)	70daN
Stress Member	Aramid Braid/Kevlar
Weight	53Kg/Km
Double Jacket	No
Operating Temperature	-40°C to 70°C
Storage Temperature	-40°C to 85°C
Data Transfer Rate	16 mbps
Compatibility:	
WPSR cables compatible with Field Digitizing Unit (FDU), 428XL LAUL & 428XL LAUX	

Version 1.1