



# HGS (INDIA) LIMITED



## RSR Battery Cable




158, Sector-4, IMT Manesar, Gurugram-122050 Haryana INDIA  
Tel: +91 (0124) 4681800, Fax: +91 (0124) 4681845  
Email: sales@hgsindia.com



# HGS (INDIA) LIMITED



## SCHEMATIC RSR Battery Cable

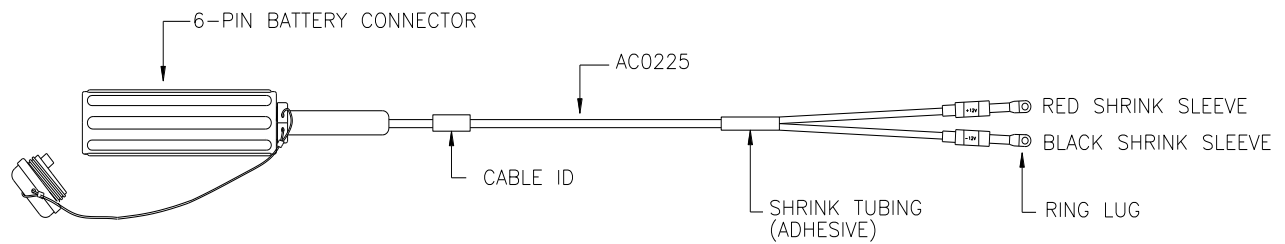



# HGS (INDIA) LIMITED



## SPECIFICATIONS

### RSR Battery Cable

- Three conductor battery cable used with ION Scorpion systems.
- Bare conductor for low resistance and heavy duty polyurethane sheathing.
- Withstands up to 8 amp current.
- Insulation dia: 2.25 mm
- Outer dia:  $6.8 \pm 0.2$  mm
- Conductor resistance < 19 ohms / km.
- Break strength > 65 kgf.
- Weight / meter: 66 gms.
- Operating Temperature Range:  $-20^{\circ}\text{C}$  to  $+70^{\circ}\text{C}$

Version 1.1