



HGS (INDIA) LIMITED



408 STPL HALF LINK CABLE



158, Sector-4, IMT Manesar, Gurugram-122050, Haryana, INDIA
Tel: +91 (0124) 4681800
Email: sales@hgsindia.com




HGS (INDIA) LIMITED



SCHEMATIC


408 STPL HALF LINK CABLE

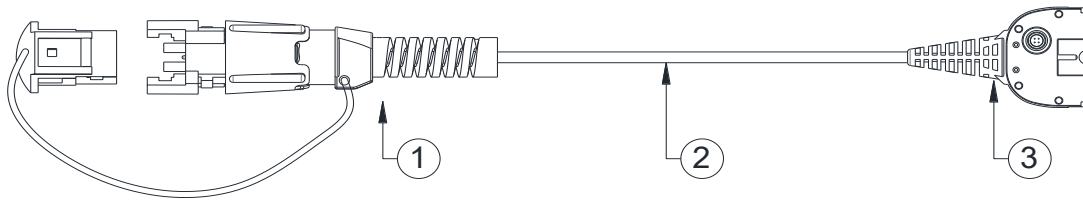

3	408 TAKE OUT, STPL CABLE	SJ000535
2	4 COND. STPL CABLE, OD-6.5MM, ORANGE	AC000304
1	END CONNECTOR ASSEMBLY, 6.5MM CABLE	AJ000376
SL. NO.	DESCRIPTION	P/N

SCHEMATIC

408 STPL MIDDLE SECTION CABLE

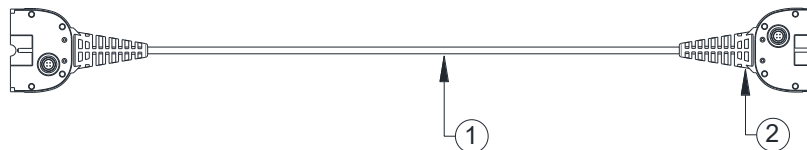

2	408 TAKE OUT, STPL CABLE	SJ000535
1	4 COND. STPL CABLE, OD-6.5MM, ORANGE	AC000304
SL. NO.	DESCRIPTION	P/N

158, Sector-4, IMT Manesar, Gurugram-122050, Haryana, INDIA

Tel: +91 (0124) 4681800

Email: sales@hgsindia.com




HGS (INDIA) LIMITED



SCHEMATIC

408 STPL CABLE

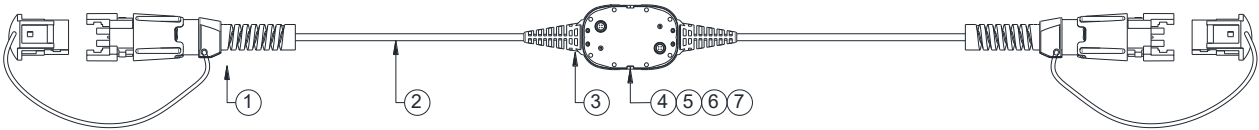

7	O-RING, ID 14.2x1.85MM	CE001257
6	MOUNTING PLATE, AL., 408 STPL T.O	CE001256
5	EARTHING CLAMP, 408 STPL T.O	CE001255
4	GROUNDING NUT, 408 STPL T.O	CE001254
3	408 TAKE OUT, STPL CABLE	SJ000535
2	4 COND. STPL CABLE, OD-6.5MM, ORANGE	AC000304
1	END CONNECTOR ASSEMBLY, 6.5MM CABLE	AJ000376
SL. NO.	DESCRIPTION	P/N

158, Sector-4, IMT Manesar, Gurugram-122050, Haryana, INDIA

Tel: +91 (0124) 4681800

Email: sales@hgsindia.com



HGS (INDIA) LIMITED



SPECIFICATIONS

408 STPL CABLE

Parameters	Value
Field Conditions	Dry
Conductor Arrangement	1 quad
Conductor Type	Stranded
Water Blocked	No
Max. Water Depth	Rainy
Diameter	6.5mm
Tensile Strength (Nude Cable)	100daN
Tensile Strength (with connector)	70daN
Stress Member	Kevlar
Weight	47Kg/Km
Double Jacket	No
Operating Temperature	-40°C to 70°C
Storage Temperature	-40°C to 80°C

Version 1.2