



HGS (INDIA) LIMITED



6 Contact Morpho, Dynacon, Field Installable Connector



158, Sector-4, IMT Manesar, Gurugram-122050 Haryana INDIA
Tel: +91 (0124) 4681800
Email: sales@hgsindia.com




HGS (INDIA) LIMITED




SCHEMATIC

6 Contact Morpho, Dynacon, Field Installable Connector

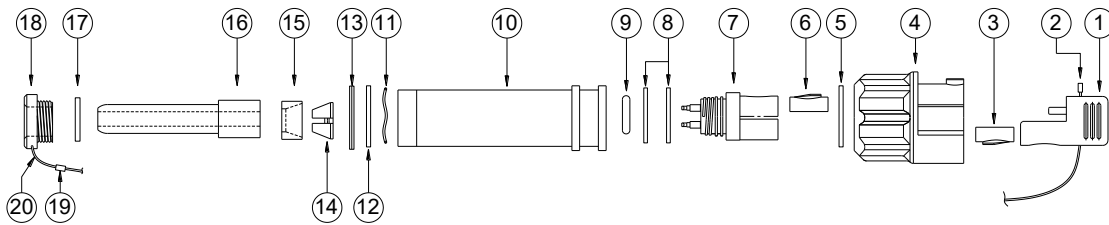

20	INSULATED WIRE ROPE	30 CM
19	CRIMP SLEEVE	01 No.
18	COMPRESSION NUT	01 No.
17	BOOT WASHER	01 No.
16	CABLE BOOT	01 No.
15	WASHER COLLET	01 No.
14	COLLET	01 No.
13	RETAINING RING	01 No.
12	ANTI-FRICTION WASHER	01 No.
11	WAVE SPRING	01 No.
10	BACK SHELL	01 No.
9	STRESS WAFER	01 No.
8	O-RING	02 Nos.
7	CONNECTOR SUB ASSY.	01 No.
6	CONNECTOR SEAL INSERT	01 No.
5	ANTI-FRICTION WASHER	01 No.
4	CONNECTOR LOCKING HANDLE	01 No.
3	DUST CAP SEAL INSERT	01 No.
2	STOP SLEEVE	01 No.
1	DUST CAP	01 No.
S. NO.	DESCRIPTION	QTY



FACE VIEW

158, Sector-4, IMT Manesar, Gurugram-122050 Haryana INDIA

Tel: +91 (0124) 4681800

Email: sales@hgsindia.com



HGS (INDIA) LIMITED



SPECIFICATION

6 Contact Morpho, Dynacon, Field Installable Connector

- Ideal for using as a replacement for defective over moulded connectors on Scorpion land cables for effective field repairs.
- Connector with 3 sets of male & female contacts.
- Available for different cable sizes.
- Impact Resistant Material.
- Fitted with dust cap.
- Mating with a locking handle.
- Maximum strength in rugged field conditions.
- Water proof for marsh environment.
- Gold plated pins & sockets assure positive electrical connections.
- Two options available for stress member termination based on customer's preference; either stress wafer termination or potted Kevlar termination.
- Operating Temperature Range: -20°C to +70°C
- Pressure Rating: Up to 3 bar

Version 1.2