




HGS (INDIA) LIMITED



HGS 61 Pin Female Field Installable Conn. Assy.

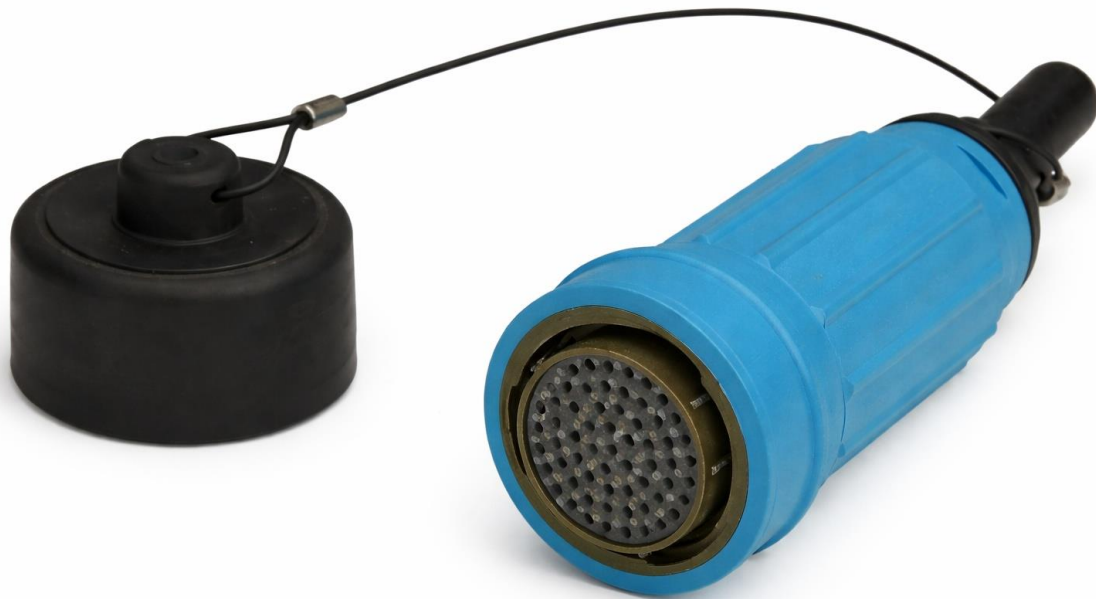

158, Sector-4, IMT Manesar, Gurugram-122050, Haryana, INDIA
Tel: +91 (0124) 4681800
Email: sales@hgsindia.com




HGS (INDIA) LIMITED



SCHEMATIC

HGS 61 Pin Female Field Installable Conn. Assy.

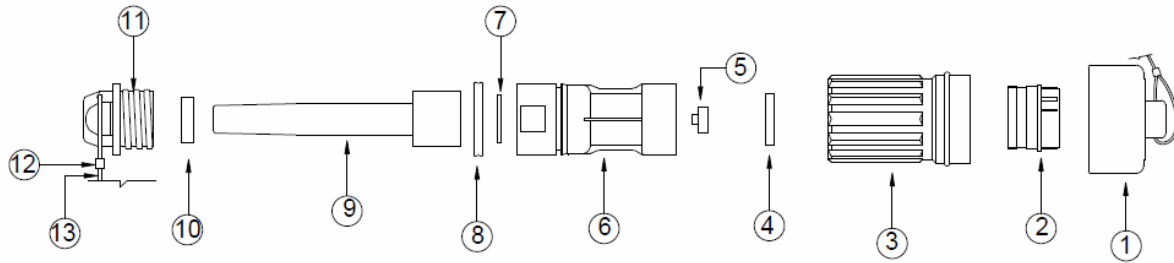

13	INSULATED WIRE ROPE, 100LBS, DIA-1.55MM	01 No.
12	CRIMP SLEEVE	01 No.
11	BOOT NUT, BLACK, HGS-16F CONN.	01 No.
10	BOOT WASHER, HGS-16F CONN.	01 No.
9	CABLE BOOT, 8.5MM CABLE DIA, HGS-16F CONN.	01 No.
8	QUADRING, ID 33.5 X 2.6MM THK, HGS-16F CONN.	01 No.
7	ALUMINIUM WASHER, HGS-16F CONN.	01 No.
6	CONN. BODY SUB ASSY., BLUE, HGS-61 PIN F CONN.	01 No.
5	CABLE ANCHOR, AFTER M/C, HGS-61 PIN CONN	01 No.
4	FLAT RING FOR HGS-61 PIN F CONN.	01 No.
3	COUPLING RING, BLUE, HGS-61 PIN F CONN.	01 No.
2	61 PIN CONN. INSERT	01 No.
1	DUST CAP SUB ASSY., HGS-61 PIN F CONN.	01 No.
SL. NO.	DESCRIPTION	QTY.

158, Sector-4, IMT Manesar, Gurugram-122050, Haryana, INDIA

Tel: +91 (0124) 4681800

Email: sales@hgsindia.com



HGS (INDIA) LIMITED



SPECIFICATIONS

HGS 61 Pin Female Field Installable Conn. Assy.

- Cable Capacity – 6.5 to 12 mm OD
- Easily field repairable
- Impact resistant material
- Cable entry kit prevents rotational twist to conductors inside connector
- Cable anchor to avoid stress on solder joints
- Fitted with dust cap
- Operating Temperature Range: -20°C to +70°C
- Pressure Rating: Up to 3 bars

Version 1.2