



HGS (INDIA) LIMITED



Hot Swappable Battery Y Power Cable



158, Sector-4, IMT Manesar, Gurugram-122050, Haryana, INDIA
Tel: +91 (0124) 4681800
Email: sales@hgsindia.com




HGS (INDIA) LIMITED



SCHEMATIC

Hot Swappable Battery Y Power Cable

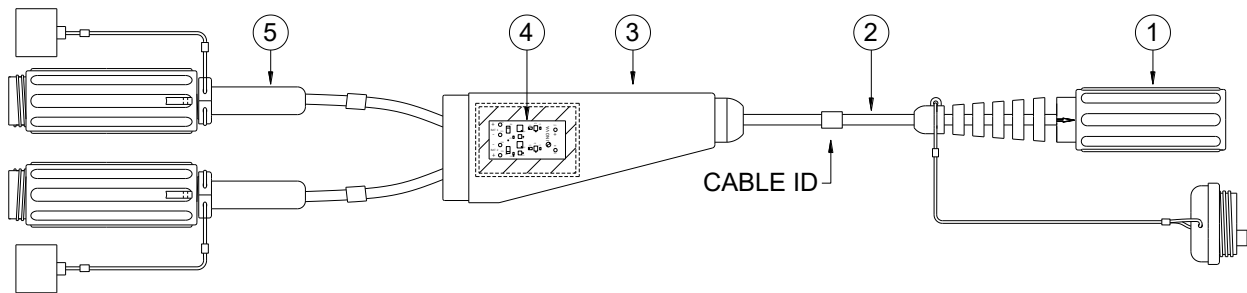

5	4 OF 8 PIN F DYN FIELD INST. CONN. ASSY. WITH 4 START	02 Nos.
4	ASSY. BATTERY I/F WYE CABLE WITH PCB	01 No.
3	MOULDED JUNCTION FOR 2 CABLES ENTRY WITH PCB	01 No.
2	2 CORE BATTERY CABLE, BLACK	As Req.
1	2 OF 8 PIN M DYN OVERMOULD CONN ASSY. 4 START	01 No.
S. NO.	DESCRIPTION	QTY

158, Sector-4, IMT Manesar, Gurugram-122050, Haryana, INDIA

Tel: +91 (0124) 4681800

Email: sales@hgsindia.com



HGS (INDIA) LIMITED



SPECIFICATIONS

Hot Swappable Battery Y Power Cable

- Y adapter dynacon 2/8 pin male connector to two 4/8 pin female field installable connector.
- No direct impact on solder joints while pulling cable.
- Water proof for marsh environment.
- Impact Resistant Material.
- Gold plated pins & sockets assure positive electrical connections.
- Maximum strength in rugged field condition.
- Fitted with dust cap.
- Operating temperature range: -20°C to +70°C.
- Pressure rating : 2 bar.

Version 1.2