



**HGS (INDIA) LIMITED**



**HG-6XTW 4.5 Hz Geophone Element**



Based on the technology transfer for manufacturing the SM<sup>®</sup> range of geophones from Sensor<sup>®</sup> Nederland BV, HGS (India) Limited (erstwhile Geosource India Limited) offers the HG-6XTW geophone which is a long coil travel geophone based on the HG-4 design. The long coil travel offers advantages where large amplitude signals may be encountered. It has a rugged design with rotating coil contacts.

The natural frequency of the HG-6XTW geophone is 4.5Hz and it has a tilt angle tolerance of +/- 5 Degrees. This geophone is available both in the vertical and horizontal orientations.

**Specifications - HG-6XTW 4.5 Hz Geophone Element**

**B - Coil**

**Frequency**

**Value**

Natural frequency	4.5 Hz
Tolerance	±0.5Hz
Maximum tilt angle for specified Fn	5°
Typical spurious frequency	140 Hz

**Distortion**

Distortion with 17.78 mm/s p.p. coil-to-case velocity	<0.3%
Distortion measurement frequency	12 Hz
Maximum tilt angle for distortion specification	5°

**Damping**

Open circuit (typical)	0.56
Tolerance (open circuit)	±5%
Shunt for 0.60 damping	32960 Ω
Shunt for 0.70 damping	9090 Ω

**Resistance**

Standard coil resistance	375 Ω
Tolerance	±5%

**Sensitivity**

Open - circuit Sensitivity	28.8 V/m/s
Tolerance	±5%

$R_t B_c f_n$	6000 ΩHz
Moving mass	11.1 g
Maximum coil excursion p.p .	4 mm

**Physical Characteristics**



Diameter	25.4 mm
Height	36 mm
Weight	81 g
Operating temperature range	-40°C to 100°C

**Warranty Period\*** 3 years

\* Warranty excludes damage caused by high voltage and physical damage to the element case.

All parameters are specified at +20°C in the vertical position unless stated otherwise.

### Geophone Response Curve and Phase Lag

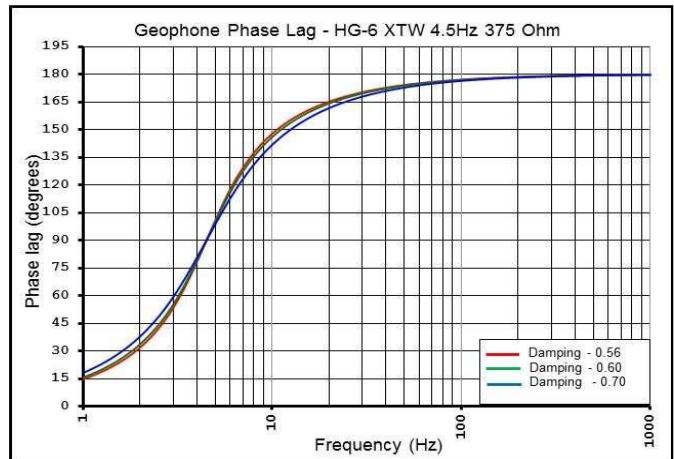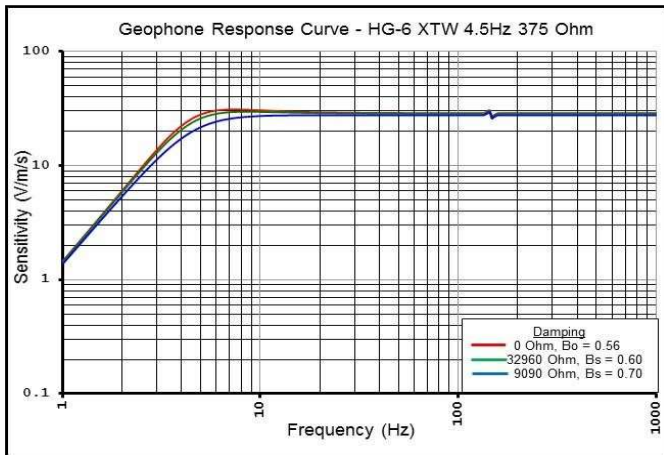

### Ordering information

Description	Part No.	Direction
HG-6XTW UB 4.5 Hz 375 Ω	SG000444	Upright

Version 1.0

**India**  
 HGS (India) Ltd  
 Tel : +91-11-46066604  
 Website: [www.hgsindia.com](http://www.hgsindia.com)

**The Netherlands**  
 HGS Products B.V.  
 Tel : +31 708200820  
 Website: [www.hgsproducts.nl](http://www.hgsproducts.nl)